



canbuilt.com

## SPECIFICATIONS

MODEL	POWER	BORE	STROKE	ADVANCE	RAM SPEED PRESS	RETURN	CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
									L	W	H
EH-150T	10 HP 3 phase	11"	16"	29 IPM	6 IPM	33 IPM	150	6,000	58"	96"	108"

Standard voltages available - please specify when ordering.


### H FRAME PRESS 150 Ton

#### STANDARD FEATURES

- ✓ Electric / Hydraulic operation provides smooth, consistent pressing action.
- ✓ Open sides to facilitate work on long pieces.
- ✓ Flat ram nose can be easily changed to allow the user to adapt the press to a specific job.
- ✓ Quality Baldor motor, low speed.
- ✓ Low speed pump - quiet, dependable operation.
- ✓ Self-locking table design eliminates lateral movement.
- ✓ Double-acting cylinder permits pulling as well as pressing ram action.
- ✓ Hydraulic power-lift for vertical displacement of table.
- ✓ Pressure regulator to limit the ram pressure.
- ✓ Cylinder activation is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ High capacity 20 GAL. hydraulic oil reservoir.
- ✓ Low pressure hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ All hydraulic and mechanical parts are standard in the industry, and available throughout North America.

#### DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
EH-150T	94	60	82	34.5	15	38

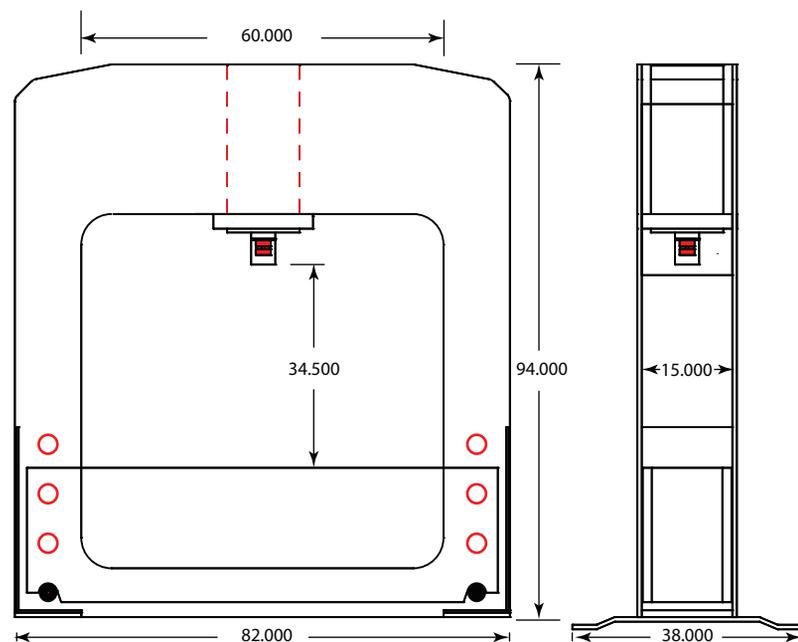

#### AVAILABLE OPTIONS

- VB-150 V BLOCKS matched pair.
- FSG-150 Front safety guard for operator protection.
- FPS-150 Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.
- 10-230-1 10 HP 230 VOLTS 1 PHASE 41 AMPS.
- ASC-150 Adjustable stroke control c/w foot pedal-electric solenoid valve, speed control and electric control panel.
- SSE-150 Stop / Start c/w emergency stop button, wired direct to motor.