



CANBUILT MFG.


Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597
Email: sales@canbuilt.com Website: www.canbuilt.com

103 Milvan Drive,
Toronto, Ontario,
Canada, M9L 1Z7

2 TON MOBILE CRANE



Model: # 3900

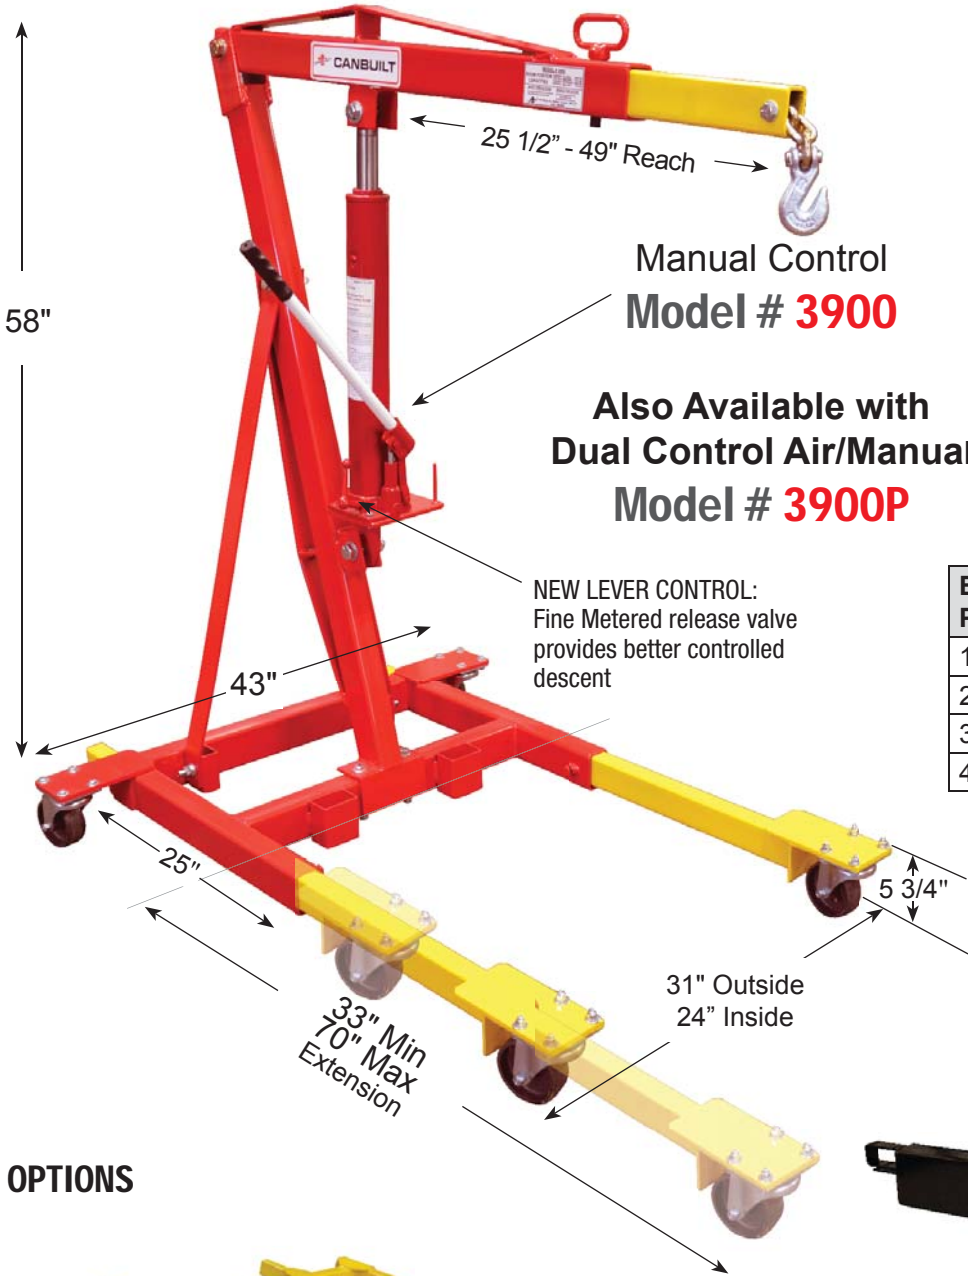

- Flow through base design allows front legs to telescope front & back. Use counter balance for greater load capacity and stability
- Bolt-on 4" steel swivel wheels, rectangular tubing for maximum strength and safety factors
- Bolt together design for easy breakdown and storage, using high tensile bolts in all areas of stress

Boom Position	Height	Length	Boom Capacity
1 Closed	86"	25 1/2"	4000 lbs
2 Mid Point	90"	33"	2500 lbs
3 Mid Point	96"	42"	1500 lbs
4 Max Extension	101"	49"	800 lbs


NOTE:
Suggested min 12" between drop point of hook and wheels on front legs

OPTIONS



Model # 3200SSL Skid Spread Adapter

Skid Spread Adapter, slips into base of all Canbuilt cranes except 4400P, legs install into adapter and provides a 48" clear space between the legs, enabling the crane to straddle and safely lift from the middle of a standard 42- 44" skid.

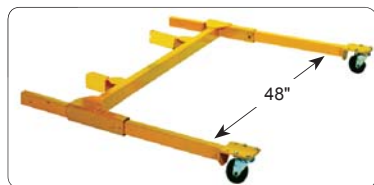

Model # 5280 Crane Base Counter Balance

Counterbalance allows lifting when the lift point is extended past the front wheels or when dealing with low clearance vehicles where crane legs can't slide under. Then, legs are removed and installed from the rear and crane can be moved right up to the vehicle to perform the lift.

Available 100 Lbs counterbalance units. Fits behind upright mast. Put them in line or stack them up for more weight.

