

HEAVY DUTY ELECTRIC/HYDRAULIC PRESSES

June 2022

SPECIFICATIONS

MODEL	POWER	BORE	STROKE	ROD	RAM SPEED		CAPACITY	WEIGHT	SHIPPING DIMENSIONS	
NUMBER					PRESS	RETURN	(TONS)	(LBS)	$(L \times W \times H)$	
EH-30T	5 HP 230 1 PH	5"	16"	2.5"	29IPM	38IPM	30	1,400	48" 62" 88"	

30 TON

MODEL # EH-30T

STANDARD FEATURES

- Electric / Hydraulic operation provides smooth, consistent pressing action.
- Open sides
- Flat ram nose can be easily changed to allow the user to adapt the press to a specific job.
- Quality Baldor motor, low speed.
- Low speed pump quiet, dependable operation.
- Self-locking table design eliminates lateral movement.
- Double-acting cylinder permits pulling as well as pressing ram action.
- Hydraulic power-lift for vertical displacement of table.
- Cylinder activation is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- High capacity 10 Gal. Hydraulic oil reservoir.
- Low pressure hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- All hydraulic and mechanical parts are standard in the industry, and available throughout North America.

AVAILABLE OPTIONS

- PR-30 Pressure regulator to limit the ram pressure.
- VB-30 V BLOCKS m atched pair.
- FSG-30 Front safety guard for operator protection.
- FPS-30 Foot pedal electric solenoid valve for hands-free operation, c/w electric control panel.
- ASC-30 Adjustable stroke control c/w foot pedal-electric solenoid valve, speed control, and electric control panel.
- 5-24 24 Inch stroke cylinder.
- SSE-30 Stop / Start c/w emergency stop button, wired direct to motor.


ELECTRIC / HYDRAULIC SPECS: Standard Voltages Available: Please specify when ordering





HEAVY DUTY ELECTRIC/HYDRAULIC PRESSES

DIMENSIONS (INCHES)											
MODEL NUMBER	А	В	С	D	Е	F					
EH-30T	75	42	54	34	9	30					

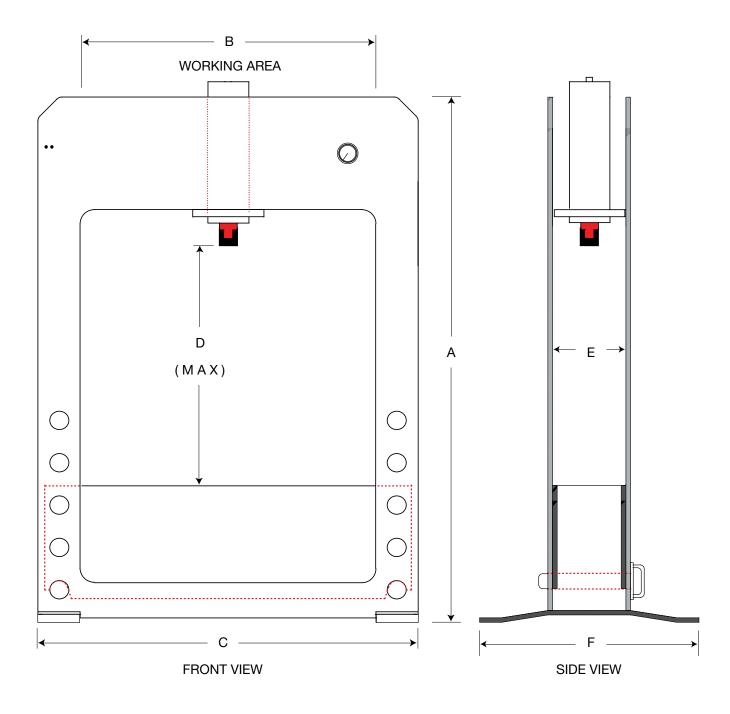

103 Milvan Drive, Toronto, Ontario, Canada, M9L 1Z7

Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597 Email: sales@canbuilt.com