

CANBUILT MFG.

Foll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597

103 Milvan Drive, Toronto, Ontario, Canada, M9L 1Z7

AIR OPERATED STUB STYLE SINGLE ACTION 3:1 OIL PUMP

Dispense fluid from various sized containers by adjusting the length of suction tube to fit

Model # FP-22730

Features

- Delivery rate 3.7 GPM
- Air consumption 8.12 CFM
- Accommodates various tank depths by adding personalized suction tube
- 3:1 ratio stub style
- Air regulator with gauge, filter and automatic water drain
- Suction tube thread size 1" NPT
- ½" x 48" hose
- 1/4" x 48" air hose
- Ball valve
- · Quick connect couplers for air
- Bung adapter
- · Maximum fluid viscosity 130 SAE
- Foot valve and screen





Recommended for


- Oil
- Antifreeze

Application

 Situations where a customized tube length will enhance the flexibility of system

Number of boxes and contents

• 1 box (29" x 6" x 6") (17 lb.)

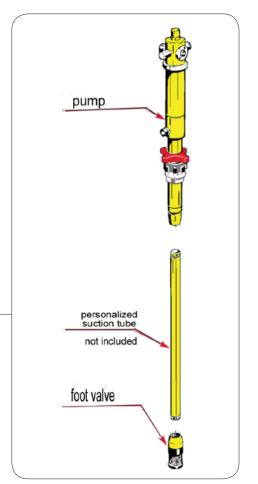

Customization

To customize the pump, take a 1" diameter water pipe, thread it and screw between the pump and the foot valve using chemical sealant to prevent air from entering during pumping, or to prevent fluid leaking out when not in use.

The included Foot valve is essential for neutralizing the effect caused by the suction distance. Prevents emptying of the suction tube during idle periods so that the pump is always ready for use