



CANBUILT MFG.

Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597
Email: sales@canbuilt.com Website: www.canbuilt.com

103 Milvan Drive,
Toronto, Ontario,
Canada, M9L 1Z7

M&B 3 SERIES TIRE CHANGERS SWING ARM TYPE

For workshops & tire specialists
Powerful, practical & space saving




Model# **TC-325it** 25" Diameter Inside Clamping

- Manages every tire application available in today's market
- Tough structure handles high impact forces, important when working with wide and low profile tires
- Swing arm reduces required working space to a minimum

See page 4 for Specs.



Efficient tubeless inflation through extra circuit with direct passage to the jaws outlets, allowing the beading in any type of tire



Turntable with mobile clamps (TC-328it)



The special shape and toughness of the bead breaking arm ensure the rapid bead breaking. Opening range plate is easily adjustable to be fitted to all types of wheels (max. width 16").

QUALITY • PERFORMANCE • LONGEVITY

Technoswing Arm

Model# **TC-0300TS**

for the **TC-322it**, **TC-325it** and **TC-328-2S**



If you work on hard, large size, wide and low profile tires (UHP e Run Flat (RSC)), you need this arm. The tough structure is designed with 1 air cylinder of 3 1/4" (80 mm) that are not subject to flexion during heavy work operations. Comes pre-assembled and tested when ordered with TC-0325it or TC328-2S model machines.



Positions the rim during locking operation



Allows the bead to be held in the rim during mounting



Roller arm with the option of operating under the tire greatly helps in the demounting and mounting



Maintains the tire bead on the rim facilitating the demounting procedure

Accessories



SET OF 2 EA # **MB199130**

NYLON DUCKBILL PROTECTORS FOR ALUMINUM RIMS

Universal fit, for most standard tire machines. Nylon protectors snap onto Duckbill to protect aluminum rims from accidental damage. **Sold as a kit: includes 2 Duckbill protectors and 2 Duckbill heel protectors**



Model # **MB200589**

WHEEL CLAMP SLIDE GUARD KIT

Nylon protectors snap onto rimclamp sliders and remain in place to protect aluminum rims from accidental damage. **Sold as a kit: includes 4 slider protectors**



Model # **MB201370**

PLASTIC MOUNTING/DEMOUNTING TOOL



Model # **MB200215**

BEAD BREAKER PROTECTOR FOR ALUMINUM RIMS


Nylon protector covers hydraulic bead breaker and remains in place to protect aluminum rims from accidental damage while breaking the bead



Model # **MB201359**

DEMOUNT LEVER PLASTIC PROTECTOR

Nylon protector covers Demount lever to protect aluminum rims from accidental damage while mounting or demounting the tire



Model # **MB200242**


PLASTIC JAW INSERT FOR WEDGE CUP

Nylon protectors snap onto wheel clamp wedge to protect aluminum rims from damage



Model # **MB200604**

MOTORCYCLE ADAPTER, SET OF 4

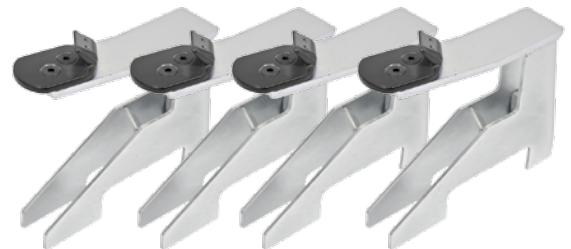

Model # **MB200606**

SCOOTER ADAPTER, SET OF 4

Adapters to change tires on scooters, golf carts and small diameter tires

Specifications

SPECIFICATIONS	MODEL # TC-0325IT
Operating pressure	115 - 175 PSI
Bead breaker force	2500 kg
Max wheel diameter	44" (1160 mm.)
Wheel width	3" - 16"
Rim diameter (locked internally)	12" - 22"
Rim diameter (locked externally)	14" - 25"
Motor Speed	8 RPM
Motor	110v 1PH