



CANBUILT MFG.

Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597
Email: sales@canbuilt.com Website: www.canbuilt.com

103 Milvan Drive,
Toronto, Ontario,
Canada, M9L 1Z7

M&B 5 SERIES TIRE CHANGERS TILT BACK TYPE

Model#
TC-0525-2S

Shown with Optional
Technoarm (sold separately)

Whether working on standard steel rim wheels or new alloy low profile tires, this machine has the power and ruggedness to do the job.

For those demanding performance tires, low profile and run flats, it is strongly recommended to also get the Helper Arm and Group, to avoid damaging the expensive rims that those tires come with.



SPECIFICATIONS	MODEL # TC-0525-2S
Inside Clamping	Min. 12" - Max. 22"
Outside Clamping	Min. 14" - Max. 25"
Max wheel diameter	46"
Wheel width	3" - 16"
Bead Breaker Pressure	2,500 KG



Intertek
4003804



POWER INVERTER with
variable speed (10 to 17 RPM)
with pedal control. Provides constant
torque from beginning to end.
MORE SPEED, POWER and CONTROL





QUALITY • PERFORMANCE • LONGEVITY



The special shape and toughness of the bead breaking arm ensure the rapid bead breaking. Opening range plate is easily adjustable to be fitted to all types of wheels (max. width 16").

Efficient tubeless inflation through extra air circuit with direct passage to the jaws outlets, allowing the beading in any type of tire

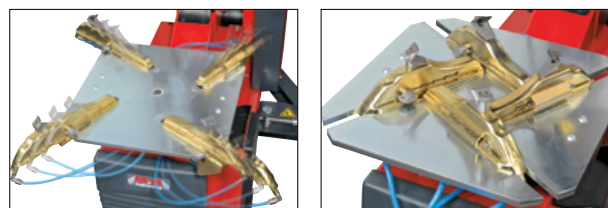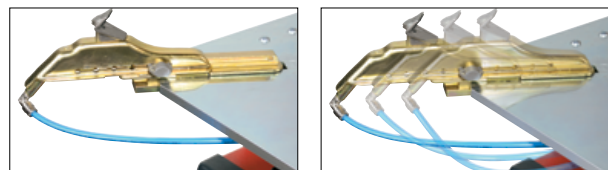

Turntable with mobile clamps to fit wider rims.
Only on the TC-528it and TC-528-2S Models

Optional



Mounts to:

- TC-0525-2S
- TC-0528-2S

Model#
TC-0550TH
Tecnohelp & Helper Group

Made to simplify and facilitate the operator during the demounting and mounting procedure. Its great ergonomic design and ease of use make it an unbeatable device.

SPECIFICATIONS	MODEL # TC-0525-2S	MODEL # TC-0528-2S
Operating pressure	115 - 175 PSI	115 - 175 PSI
Bead breaker force	2500 kg	2500 kg
Max wheel diameter	46" (1160 mm.)	46" (1160 mm.)
Wheel width	3" - 16"	3" - 16"
Rim dia. (locked internally)	12" - 22"	10" - 28"
Rim dia. (locked externally)	14" - 25"	12" - 31"
Motor Speed	10-17 RPM	10-17 RPM
Motor	110v 1PH	110v 1PH

Accessories



SET OF 2 EA # **MB199130**

NYLON DUCKBILL PROTECTORS FOR ALUMINUM RIMS

Universal fit, for most standard tire machines. Nylon protectors snap onto Duckbill to protect aluminum rims from accidental damage. **Sold as a kit: includes 2 Duckbill protectors and 2 Duckbill heel protectors**



Model # **MB200589**

WHEEL CLAMP SLIDE GUARD KIT

Nylon protectors snap onto rimclamp sliders and remain in place to protect aluminum rims from accidental damage
Sold as a kit: includes 4 slider protectors



Model # **MB201370**

PLASTIC MOUNTING/DEMOUNTING TOOL



Model # **MB200604**

MOTORCYCLE ADAPTER, SET OF 4



Model # **MB200215**

BEAD BREAKER PROTECTOR FOR ALUMINUM RIMS


Nylon protector covers hydraulic bead breaker and remains in place to protect aluminum rims from accidental damage while breaking the bead



Model # **MB201359**

DEMOUNT LEVER PLASTIC PROTECTOR

Nylon protector covers Demount lever to protect aluminum rims from accidental damage while mounting or demounting the tire



Model # **MB200242**

PLASTIC JAW INSERT FOR WEDGE CUP

Nylon protectors snap onto wheel clamp wedge to protect aluminum rims from damage



Model # **MB200606**

SCOOTER ADAPTER, SET OF 4

Adapters to change tires on scooters, golf carts and small diameter tires